


OPTIMUM 208 SUPER FINE SEED CLEANER

Designed for high-quality fine cleaning of seeds, malting barley, legumes, grains, and garden seeds.

The unique air lifting unit makes the Optimum Super 208 ideal for the most challenging separations. The Super fine cleaner includes **a shaker feeder, pre-suction and after-suction system, electronic control system, flexible screen flow, and air lifting fan.**

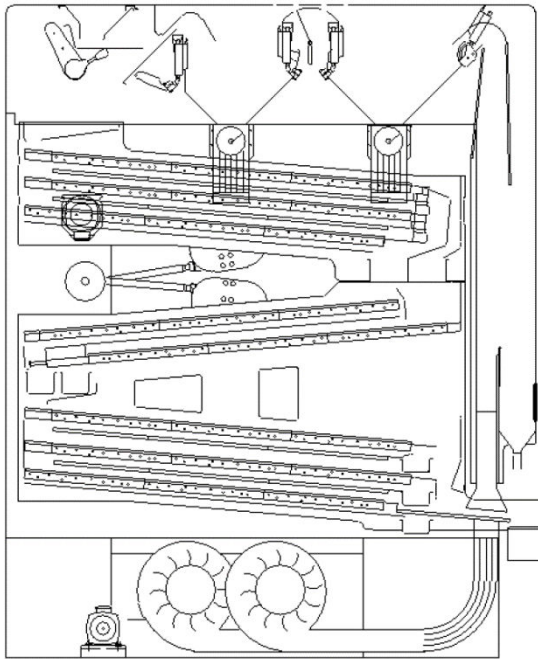

SEEDS	Bulk density t/m ³	Moisture content %	Capacity t/h
Barley	0.68	14	22
Clover	0.82	14	8
Coffee, green	0.65	14	20
Maize	0.71	14	14-20
Oats	0.51	14	16
Peas, common	0.7	14	20
Rapeseed	0.74	7-9	15
Rice, paddy	0.51	14	10-12
Rice, white	0.75	14	20
Rye	0.69	14	22
Ryegrass	0.3	14	4
Sorghum	0.64	14	22
Soybeans	0.72	14	20
Sunflower	0.4	7-9	6-10
Wheat	0.76	14	25

Note: Capacities may vary for different impurity and moisture Contents

SCREENS

Screen angle	5.0 Degrees
Screen area, total	24 m ²
Screen size	1 250×800 mm (24 pcs)

DIMENSIONS

Overall length	3 800 mm
Overall height	4 440 mm
Overall width	2 030 mm

WEIGHT

Weight, empty	5 300 kg
Weight, operating (wheat)	5 725 kg
Weight, choked (wheat)	10 800 kg

OPERATING SPEED

Shaker feeder (shaft)	140-700 rpm
Screens (shaft), fixed speed	280-285 rpm
Screens (shaft), variable speed	260-300 rpm
Aspiration fan, 2.2 kW motor	65-750 rpm
Aspiration fan, 3 kW motor	65-850 rpm

ELECTRICAL RATINGS

Motor, shaker feeder	0.75 kW
Motor, screens	3,0 kW
Motor, aspiration fan	2.2 kW or 3 kW
Control panel	110-230 V

AIR SUPPLY AND EXTRACTION

Aspiration volume	14 000 m ³ /h
-------------------	--------------------------

DYNAMIC LOADS

Horizontal load "Ph"	±3 661 N @ 4.6-4.8 Hz
Vertical load "Pv1" (inlet end)	± 2 066 N @ 4.6-4.8 Hz
Vertical load "Pv2" (outlet end)	± 1 796 N @ 4.6-4.8 Hz

Note: Dynamic loads are for normal operation.

NOISE

Sound pressure level, empty	81.6 dB(A)
Sound power level, empty	96.1 dB(A)

COMPLIANCE

EU machinery legislation	Yes
EU ATEX legislation	Option*
EU food contact legislation	Option*

* Consult your **Saat Technologe** dealer for full details.

ENVIRONMENTAL CONDITIONS

Environment	Indoors
Temperature	From -20°C to +40°C
Altitude	Up to 800 m

SURFACE PROTECTION

Frame and enclosure	Paint (corrosivity category C2; low durability)
---------------------	---

LIFETIME

Intended life limit	20 years
---------------------	----------

SINCE
2080